


## Miniature Fuses

Very HRC Fuses 5x20  
FA Very Fast Acting  
400V from 0.04 to 4A



### Dimensions

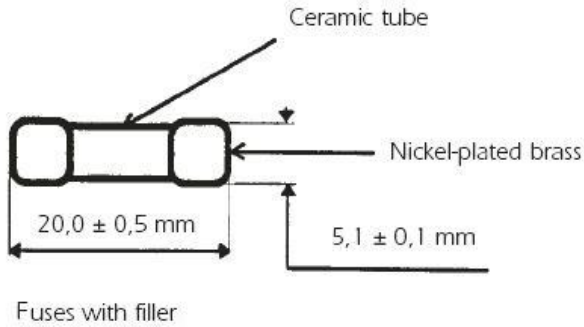

Product weight: 1.2g max.

Packaging: in blister of 50 pieces.

Ask us about boxes of 1000 pieces

Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity @ Nominal current (A)	Pre-arcing I <sup>2</sup> t @ Rated voltage (A <sup>2</sup> s)	Clearing I <sup>2</sup> t @ Rated Voltage (A <sup>2</sup> s)	Max. voltage drop (V)
MI5FA40V0.04	P093301	400	0.04	-	-	-	-
MI5FA40V0.05	N095991	400	0.05	-	-	-	-
MI5FA40V0.063	R093303	400	0.063	-	-	-	-
MI5FA40V0.08	Q097994	400	0.08	-	-	-	-
MI5FA40V0.1	T093305	400	0.1	*Cos $\mu \geq 0.7$	0.00057	0.0033	1.8
MI5FA40V0.125	W093307	400	0.125	*Cos $\mu \geq 0.7$	0.00077	0.0045	1.7
MI5FA40V0.16	Y093309	400	0.16	*Cos $\mu \geq 0.7$	0.002	0.0123	1.3
MI5FA40V0.2	P095992	400	0.2	*Cos $\mu \geq 0.7$	0.0046	0.0275	1.1
MI5FA40V0.25	E093315	400	0.25	*Cos $\mu \geq 0.7$	0.009	0.054	1
MI5FA40V0.315	Q093348	400	0.315	*Cos $\mu \geq 0.7$	0.016	0.095	0.9
MI5FA40V0.4	G093317	400	0.4	*Cos $\mu \geq 0.7$	0.03	0.18	0.85
MI5FA40V0.5	H093318	400	0.5	*Cos $\mu \geq 0.7$	0.05	0.3	0.8
MI5FA40V0.63	J093319	400	0.63	*Cos $\mu \geq 0.7$	0.12	0.73	0.7
MI5FA40V0.8	L093321	400	0.8	*Cos $\mu \geq 0.7$	0.25	1.52	0.6
MI5FA40V1	F093270	400	1	*Cos $\mu \geq 0.7$	0.11	0.45	0.46
MI5FA40V1.25	M093322	400	1.25	*Cos $\mu \geq 0.7$	0.26	1.1	0.36
MI5FA40V1.6	N093323	400	1.6	*Cos $\mu \geq 0.7$	0.39	1.6	0.42
MI5FA40V2	P093324	400	2	*Cos $\mu \geq 0.7$	0.81	3.3	0.37
MI5FA40V2.5	M093345	400	2.5	*Cos $\mu \geq 0.7$	1.44	5.8	0.34
MI5FA40V3.15	N093346	400	3.15	*Cos $\mu \geq 0.7$	2.46	10	0.33
MI5FA40V4	P093347	400	4	*Cos $\mu \geq 0.7$	4.6	18.7	0.31

Ratings lower than 0.1A : please enquire

\*10kA Cos  $\mu \geq 0.7$



Shah & Shah Enterprise



[www.shahent.co.in](http://www.shahent.co.in)

## Miniature Fuses

Very HRC Fuses 5x20  
FA Very Fast Acting  
400V from 0.04 to 4A



### Time Current Curves

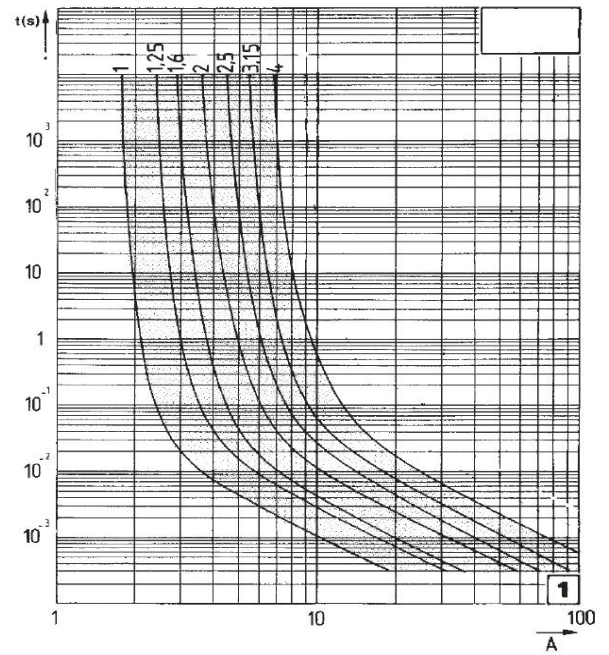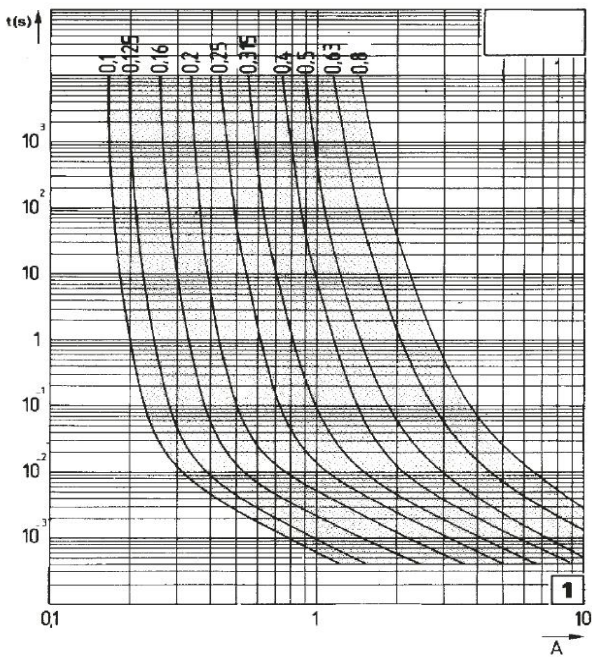

I margin  $\pm 12\%$ . Actual prearcing time(s). R.M.S. Value of prearcing current (A).



Shah & Shah Enterprise

[www.shahent.co.in](http://www.shahent.co.in)