


Miniature Fuses

Multi-meter fuses
10x35/10x38 FSM
1000V from 44/100 to 15A



Ferraz Shawmut has developed a true 1000VAC/DC fuse designed to protect both analog and digital multi-meters. These fuses cover all the industry's multi-meter requirements in three easy to use amperage ratings. Good for 1000 volts AC and DC, the FSM line of Ferraz Shawmut fuses are designed for the power electronics metering and controls market.

Dimensions

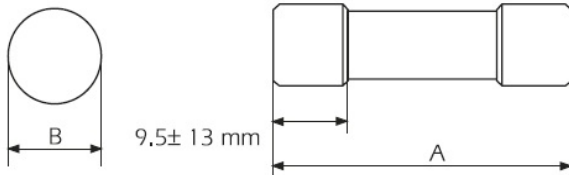

Reference Number	A	B
W232480	1.375" (35mm)	0.406
X232481	1.500" (38mm)	0.406
Y232482	1.500" (38mm)	0.406

Features & Benefits

- For the protection of multi-meters
- 1000V AC/DC for full range protection
- 100% Current Rated for continuous current carrying capability
- Glass melamine body and plated terminals provide superior reliability and performance
- Fast-Acting
- Current-Limiting
- 20000A Interrupting Rating @ 1000V AC/DC for all ratings
- Ampere Ratings 44/100A, 11A, 15A

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)
10x35	FSM44/100	W232480	1000	44/100
10x38	FSM11	X232481	1000	11
10x38	FSM15	Y232482	1000	15

Cross Reference

Ferraz Shawmut FSM replaces the Bussmann: DMM-B
Ferraz Shawmut FSM replaces Littelfuse: FLU



Shah & Shah Enterprise


www.shahent.co.in

Miniature Fuses


Multi-meter fuses
10x35/10x38 FSM
1000V from 44/100 to 15A



Time Current Curve

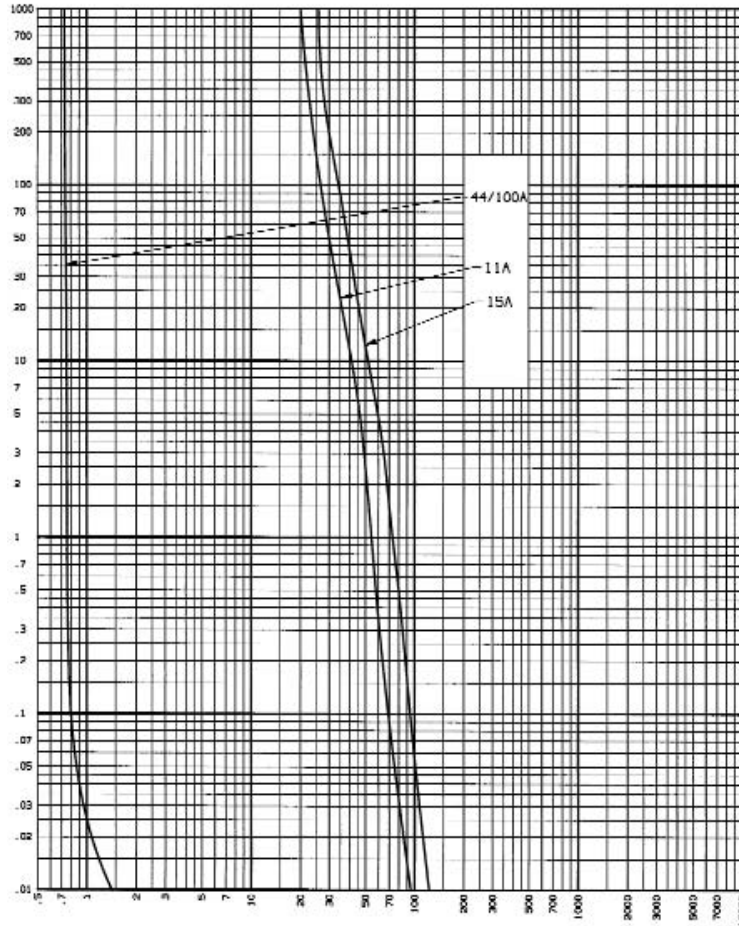

Peak let-thru Curve

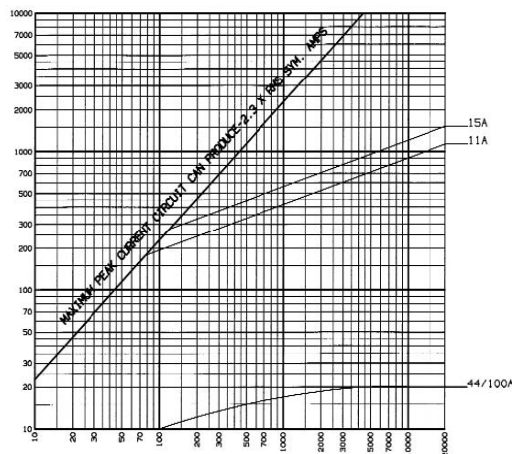

Shah & Shah Enterprise

www.shahent.co.in