

Miniature Fuses


Very HRC Fuses 6x32
FA Very Fast Acting
500V from 0.04 to 16A



Complying with UL recognized E76491



Dimensions

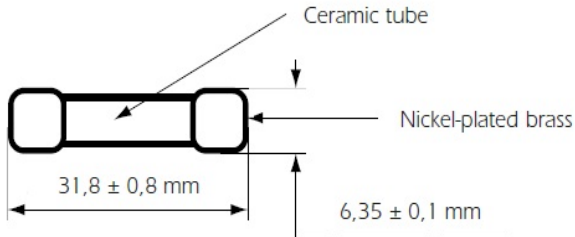

Product weight: 2.5g max.

Packaging: Blister per 50 pieces. For a 500 pieces box packaging consult us.

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity @ Nominal current (A)	Pre-arcing I ² t @ Rated voltage (A ² s)	Clearing I ² t @ Rated Voltage (A ² s)	Max. voltage drop (V)
6.3x32	MI6FA50V0.04	X078887	500	0.04	-	-	-	-
6.3x32	MI6FA50V0.05	Z078889	500	0.05	-	-	-	-
6.3x32	MI6FA50V0.063	A078890	500	0.063	-	-	-	-
6.3x32	MI6FA50V0.08	B078891	500	0.08	-	-	-	-
6.3x32	MI6FA50V0.1	L080464	500	0.1	Cos $\mu \geq 0.2^*$	0.00057	0.002	2.75
6.3x32	MI6FA50V0.125	M084214	500	0.125	Cos $\mu \geq 0.2^*$	0.00077	0.003	2.6
6.3x32	MI6FA50V0.16	Y084201	500	0.16	Cos $\mu \geq 0.2^*$	0.002	0.008	2
6.3x32	MI6FA50V0.2	N084215	500	0.2	Cos $\mu \geq 0.2^*$	0.0046	0.017	1.7
6.3x32	MI6FA50V0.025	Z084202	500	0.25	Cos $\mu \geq 0.2^*$	0.009	0.035	1.55
6.3x32	MI6FA50V0.315	A084203	500	0.315	Cos $\mu \geq 0.2^*$	0.016	0.06	1.45
6.3x32	MI6FA50V0.4	P084216	500	0.4	Cos $\mu \geq 0.2^*$	0.03	0.11	1.4
6.3x32	MI6FA50V0.5	B084204	500	0.5	Cos $\mu \geq 0.2^*$	0.05	0.2	1.4
6.3x32	MI6FA50V0.63	C084205	500	0.63	Cos $\mu \geq 0.2^*$	0.12	0.45	1.15
6.3x32	MI6FA50V0.8	L084213	500	0.8	Cos $\mu \geq 0.2^*$	0.25	0.92	1
6.3x32	MI6FA50V1	D084206	500	1	Cos $\mu \geq 0.2^*$	0.11	0.3	0.71
6.3x32	MI6FA50V1.25	E084207	500	1.25	Cos $\mu \geq 0.2^*$	0.26	0.75	0.55
6.3x32	MI6FA50V1.6	F084208	500	1.6	Cos $\mu \geq 0.2^*$	0.39	1.1	0.65
6.3x32	MI6FA50V2	G084209	500	2	Cos $\mu \geq 0.2^*$	0.81	2.2	0.55
6.3x32	MI6FA50V2.5	H084210	500	2.5	Cos $\mu \geq 0.2^*$	1.44	4	0.52
6.3x32	MI6FA50V3.15	X085442	500	3.15	Cos $\mu \geq 0.2^*$	2.46	7	0.53
6.3x32	MI6FA50V4	Y085443	500	4	Cos $\mu \geq 0.2^*$	4.6	14	0.48
6.3x32	MI6FA50V5	Z085444	500	5	Cos $\mu \geq 0.2^{**}$	11	30	0.37
6.3x32	MI6FA50V6.3	A085445	500	6.3	Cos $\mu \geq 0.2^{**}$	1	20	0.22
6.3x32	MI6FA50V8	B085446	500	8	Cos $\mu \geq 0.2^{**}$	2	35	0.22
6.3x32	MI6FA50V10	C085447	500	10	Cos $\mu \geq 0.2^{**}$	3.1	50	0.2
6.3x32	MI6FA50V12.5	D085448	500	12.5	Cos $\mu \geq 0.2^{**}$	4.5	75	0.22
6.3x32	MI6FA50V16	E085449	500	16	Cos $\mu \geq 0.2^{**}$	5.3	85	0.29

*200kA 500VAC Cos $\mu \geq 0.2$

**20kA 500VAC Cos $\mu \geq 0.2$

Ratings lower than 0.1A : please enquire



Shah & Shah Enterprise




www.shahent.co.in

Miniature Fuses

Very HRC Fuses 6x32
FA Very Fast Acting
500V from 0.04 to 16A



Time Current Curves

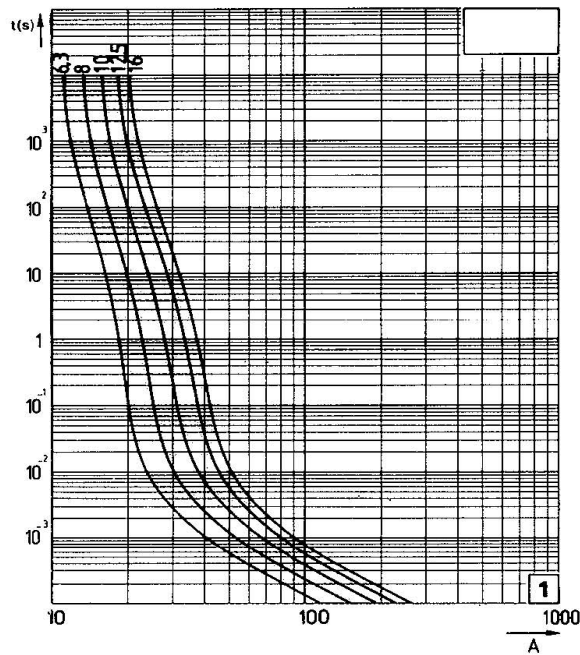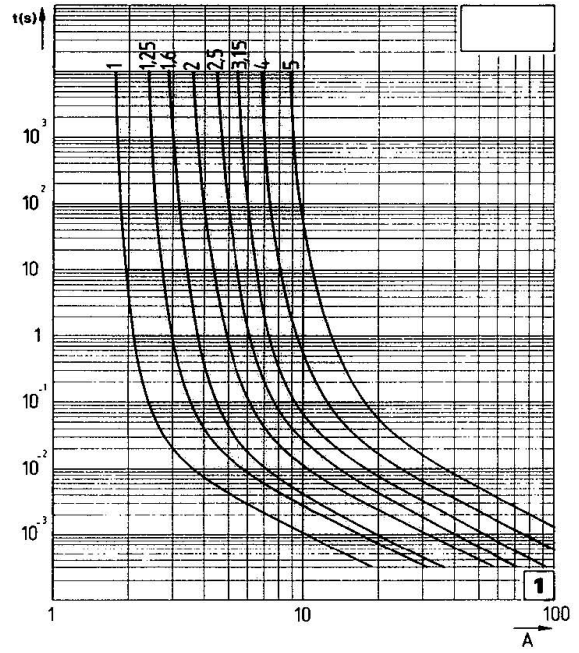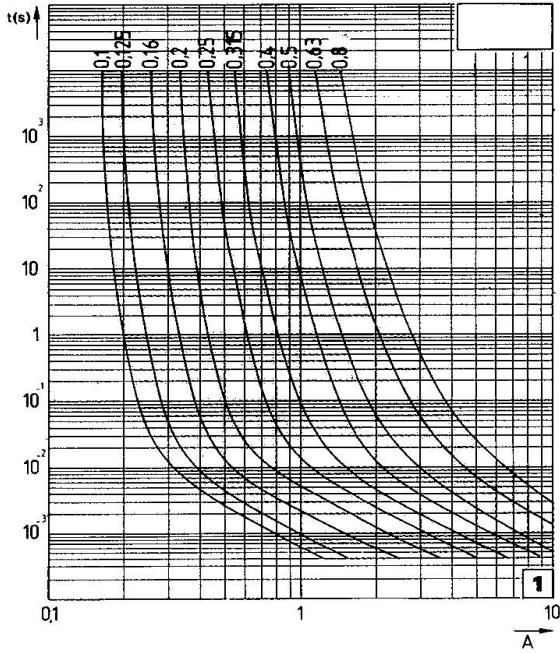

I margin $\pm 12\%$. Actual prearcing time(s). R.M.S. Value of prearcing current (A).



Shah & Shah Enterprise

www.shahent.co.in